

Voltage	: 12.8 Volt
Appr. dimensions	: 195x130x155/168 mm (LxWxH)
Terminal	: M6 insert
Container & lid	: Flame Retardant ABS
Operating temperature	
Charge	: -30°C ~ 60°C
Discharge	: -30°C ~ 60°C
Storage	: -30°C ~ 50°C

Specifications		pbq 32-12 LiFe	pbq 33-12 LiFe	pbq 36-12 LiFe
Nominal	Capacity	32 Ah	33 Ah	36 Ah
Weight (appr.)		5.3 Kg	5.4 Kg	5.6 Kg
Internal	Resistance	<80mΩ	<75mΩ	70mΩ
Specific	Energy	78 Wh/Kg	78 Wh/Kg	82 Wh/Kg
Standard	Max. Cont. Current	30A	30A	30A
Discharge at 25°C	Max. 30 sec. pulse	40A	40A	40A
	Cut off Voltage	8.0V	8.0V	8.0V
Standard Charge	Charge Voltage	14.8V	14.8V	14.8V
	Float	13.8V	13.8V	13.8V
	Style	CC/CV	CC/CV	CC/CV
	Recommended Charge Time	16A	16A	18A
		2.5h	2.5h	2.5h

The rechargeable pbq LiFe battery employs lithium iron phosphate as its cathode and carbon as its anode. The electrolyte salt dissolves in organic compound solvent and the electrolyte system is absorbed by the separators and the plates. All batteries of this type have a special one-way valve to allow the disgregate-tire solvent gases to escape.


Each individual cell is spiral wound and formed to a prismatic cell. The nominal cell voltage is 3.2V. Four cells are placed in series in order to create 12.8V.

To protect the battery from over charging and over discharging the battery is equiped with a internal battery management system (BMS). The BMS also takes care of the balance between the internal cell.

To avoid overheating of the battery, a special insertion, called PTC, is added to the electrolyte. This additive neutralizes the electrolyte and disables the battery permanently if the internal temperature exceeds 80°C.

General features

- More than 2000 deep cycles, pbq LiFe offers the lowest life-cycle costs, using a grafite anode.
- The battery may be installed in any direction, upside down is not recommended
- Excellent high-rate discharge an recharge capabilities
- Third the weight of an equivalent lead acid battery
- Long service life in floating application
- Maintainance free operation
- Excellent safety
- Environmental friendly due to the absence of heavy metals

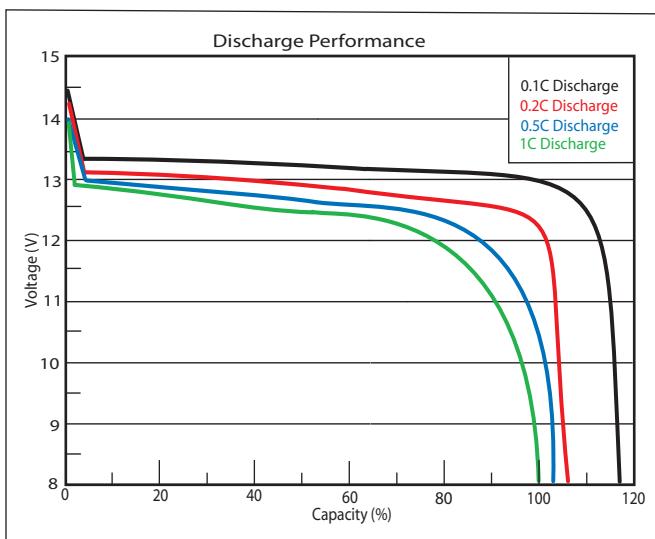

Contact your pbq dealer

or visit our website

www.pbq-batteries.com

63,5 mm x 33,8 mm (bv. HERMA 4227)